

A2K-TDC Micro Cable Assemblies

CODE-ACT-0029


Use as drop cable or to extend the length of an NMEA 2000® the backbone...



Actisense micro cable assemblies allow quick installation and come with a quality reassurance, as only the Actisense UL certified cable is used.

Available in various lengths, the cable assemblies can be used as either drop cable* from an NMEA 2000 backbone or to extend the length of the backbone cable.

Product Dimensions

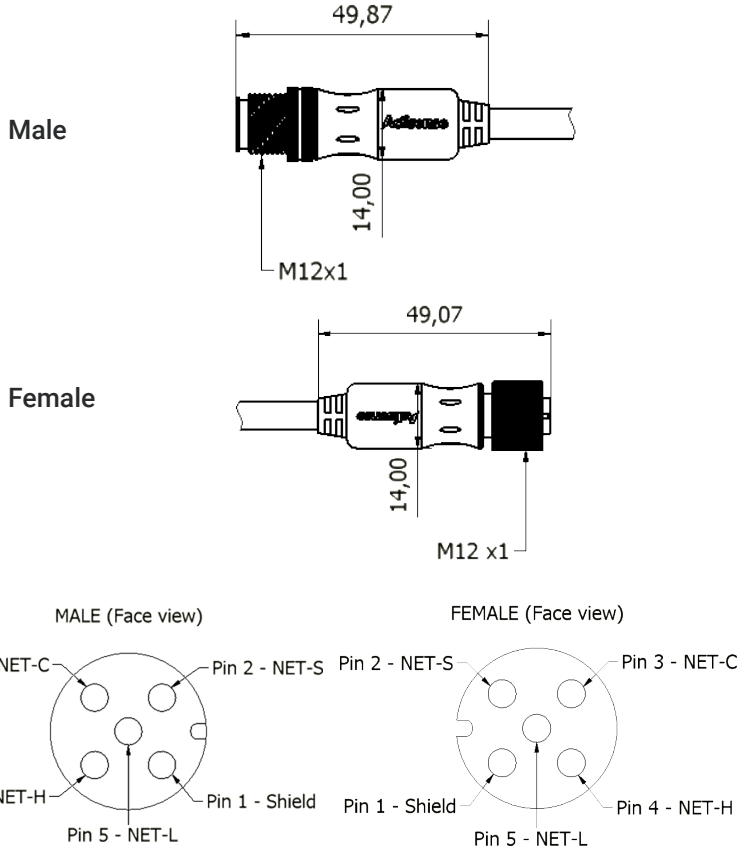

Electrical	
Rated Current	4A
Rated Voltage	60VDC
Mechanical	
Male Contact	Brass, gold plated
Female Contact	Phosphor bronze, gold plated
Contact Carrier	PBT, black
Contact Polarisation	Standard M12 -"A"- polarisation
Mating Thread	M12
Screw Cap	Brass, nickel plated
O-Ring Seal	Rubber, black
Housing	PVC, black
Power Pair	22 AWG (19 strand tinned copper)
Data Pair	24 AWG (19 strand tinned copper)
Drain	22 AWG (19 strand tinned copper)
Braid	22 AWG (19 strand tinned copper)
Jacket Material	0.8mm Nom. PVC, black
Jacket Outer Diameter	6.85mm ±0.254mm
Weights	0.25m: 51g, 0.5m: 67g,
1m: 102g, 2m: 166g,	
5m: 379g, 6m : 447g,	
8m: 570g, 10m: 733g	
Approvals and Certifications	
Protection	IP67 (when mated)
Operating Temperature	-20°C to +70°C
Storage Temperature	-40°C to +85°C
NMEA 2000 Approved	
RoHS Compliant	

Connections

Name	Connector Pins	Wire Colour
NET-L	Pin 5	Blue
NET-H	Pin 4	White
Shield	Pin 1	Green
NET-S	Pin 2	Red
NET-C	Pin 3	Black